



KEY FEATURES

Industry-leading technology provides superior performance

Flexible configurations put you in total control

Rugged, high-performance hardware is built to last

With the Trimble controller and software of your choice, enjoy seamless integrated surveying



ONE RECEIVER, MANY CONFIGURATIONS, FOR GREATER FLEXIBILITY AND CHOICE

The Trimble® 5700 GPS receiver is an advanced, but easy-to-use, surveying instrument that is rugged and versatile enough for any job.

Combine your 5700 with the antenna and radio that best suit your needs, and then add the Trimble controller and software of your choice for a total surveying solution. The powerful 5700 GPS system will provide all the advanced technological power and unparalleled flexibility you need to increase your efficiency and productivity in any surveying environment.

ADVANCED GPS RECEIVER TECHNOLOGY

The 5700 is a 24-channel dual-frequency RTK GPS receiver featuring the advanced Trimble Maxwell™ technology for superior tracking of GPS satellites, increased measuring speed, longer battery life through less power use, and optimal precision in tough environments. WAAS and EGNOS capability lets you perform real-time differential surveys to GIS grade without a base station.

MODULAR DESIGN FOR VERSATILITY

For topographic, boundary, or engineering surveying, clip the receiver to your belt, carry it in a comfortable backpack, or configure it with all components on a lightweight range pole. With the receiver attached to your site vehicle, you can survey a surface as fast as you can drive! For control applications, attach the receiver to a tripod ... it's designed to work the way your job requires.

FULL METAL JACKET ... AND LIGHTWEIGHT

The 5700 GPS receiver boasts the toughest mechanical and waterproofing specs in the business. Its magnesium alloy case is stronger than aluminum, but also 30% lighter—the 5700 weighs just 1.4 kg (3 lb) with batteries. Whether you're collecting control points on a tripod, or scrambling down a scree slope collecting real-time kinematic data, the receiver is light enough and tough enough to carry on performing.

FAST AND EFFICIENT DATA STORAGE AND COMMUNICATIONS

Use the receiver's CompactFlash memory to store more than 3,400 hours of continuous L1/L2 data collection at an average of 15-second intervals. Transfer data to a PC at speeds of more than 1 megabit per second through the super-fast USB port. Your choice of UHF radio modem is built in to the receiver to provide RTK communications receiving without the need for cables or extra power!

YOUR CHOICE OF TRIMBLE ANTENNA

Choose the high-accuracy Trimble GPS antenna that best suits your needs: the lightweight and portable Zephyr™ antenna for RTK roving, or the Zephyr Geodetic™ antenna for geodetic surveying.

The Zephyr Geodetic antenna offers submillimeter phase center repeatability and excellent low-elevation tracking, while the innovative design of its Trimble Stealth™ ground plane literally burns up multipath energy using technology similar to that used by stealth aircraft to hide from radar. The Zephyr Geodetic antenna thus provides unsurpassed accuracy from a portable antenna.

TRIMBLE 5700 GPS SYSTEM

General

- Front panel for on/off, one-button-push data logging, CompactFlash card formatting, ephemeris and application file deletion, and restoring default controls
- LED indicators for satellite tracking, radio-link, data logging, and power monitoring
- Tripod clip or integrated base case

PERFORMANCE SPECIFICATIONS

Measurements

- Advanced Trimble Maxwell technology
- High-precision multiple correlator L1 and L2 pseudorange measurements
- Unfiltered, unsmoothed pseudorange measurement data for low noise, low multipath error, low time domain correlation, and high dynamic response
- Very low noise L1 and L2 carrier phase measurements with <1 mm precision in a 1 Hz bandwidth
- L1 and L2 Signal-to-Noise ratios reported in dB-Hz
- Proven Trimble low-elevation tracking technology
- 24 Channels L1 C/A Code, L1/L2 Full Cycle Carrier, WAAS/EGNOS

Code differential GPS positioning¹

Horizontal ±(0.25 m + 1 ppm) RMS
 Vertical ±(0.5 m + 1 ppm) RMS
 WAAS differential positioning accuracy typically <5 m 3DRMS²

Static and FastStatic GPS surveying¹

Horizontal ±5 mm + 0.5 ppm RMS
 Vertical ±5 mm + 1 ppm (× baseline length) RMS

Kinematic surveying¹

Real-time and postprocessed kinematic surveys
 Horizontal ±(10 mm + 1 ppm) (× baseline length) RMS
 Vertical ±(20 mm + 1 ppm) RMS
 Initialization time Single/Multi-base minimum
 10 sec + 0.5 times baseline length in km, up to 30 km
 Scalable GPS infrastructure initialization time <30 seconds
 typical anywhere within coverage area
 Initialization reliability³ Typically >99.9%

HARDWARE

5700 GPS receiver

Physical:
 Casing Tough, lightweight, fully sealed magnesium alloy
 Water/dustproof IP67 Dustproof, protected from temporary immersion
 to depth of 1 m (3.28 ft)
 Shock and vibration Tested and meets the following
 environmental standards:
 Shock MIL-STD-810F to survive a 1 m (3.28 ft) drop onto concrete
 Vibration MIL-STD-810-F on each axis
 Weight With internal batteries, internal radio,
 internal battery charger, standard UHF antenna: 1.4 kg (3 lb)
 As entire RTK rover with batteries for greater than 7 hours,
 less than 4 kg (8.8 lb)
 Dimensions (W×H×L) 13.5 cm × 8.5 cm × 24 cm
 (5.3 in × 3.4 in × 9.5 in)
 Electrical:
 Power DC input 11 V DC to 28 V DC with over voltage protection
 Power consumption 2.5 W receiver only, 3.75 W
 including internal radio
 Battery Greater than 10 hours data logging, or greater than
 7 hours of RTK operation on two internal 2.0 Ah lithium-ion batteries
 Battery weight 0.1 kg (3.5 oz)

© 2004–2006, Trimble Navigation Limited. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited, registered in the United States Patent and Trademark Office and in other countries. Maxwell, Trimble Stealth, Zephyr, and Zephyr Geodetic are trademarks of Trimble Navigation Limited. All other trademarks are the property of their respective owners. PN 022543-074D (07/06)

Battery charger Internal with external AC power adapter;
 no requirement for external charger
 Power output 11.5 V to 20 V DC (Port 1), 11.5 V DC to 27.5 V DC
 (Port 3) on external power input
 Certification Class B Part 15 FCC certification,
 CE Mark approved, C-Tick approved, Canadian FCC

Environmental:

Operating temperature⁴ –40 °C to 65 °C (–40 °F to 149 °F)
 Storage temperature –40 °C to 80 °C (–40 °F to 176 °F)
 Humidity 100%, condensing

Communications and data storage:

- 2 external power ports, 2 internal battery ports, 3 RS232 serial ports
- Integrated USB for data download speeds in excess of 1 Mb per second
- External GPS antenna connector
- CompactFlash advanced lightweight and compact removable data storage. Options of 64 MB or 128 MB from Trimble
- More than 3,400 hours continuous L1+L2 logging at 15 seconds with 6 satellites typical with 128 MB card
- Fully integrated, fully sealed internal UHF radio modem option
- GSM, cellphone, and CDPD modem support
- Dual event marker input capability
- 1 Hz, 2 Hz, 5 Hz, and 10 Hz positioning and data logging
- 1 pulse per second output capability
- CMR1I, CMR+, RTCM 2.x and 3.x input and output standard
- 15 NMEA outputs

Zephyr antenna

Dimensions 16.2 cm × 6.2 cm diameter height (6.38 in × 2.44 in)
 Weight 0.55 kg (1.20 lb)
 Operating temperature –40 °C to 70 °C (–40 °F to 158 °F)
 Humidity 100% humidity proof, fully sealed
 Shock and vibration Tested and meets the following
 environmental standards:

- Shock MIL-STD-810-F to survive a 2 m (6.56 ft) drop onto concrete
- Vibration MIL-STD-810-F on each axis
- 4-point antenna feed for submillimeter phase center repeatability
- Integral low noise amplifier
- 50 dB antenna gain

Zephyr Geodetic antenna

Dimensions 34.3 cm (13.5 in) diameter × 7.6 cm (3 in) height
 Weight 1.31 kg (2.88 lb)
 Operating temperature –40 °C to 70 °C (–40 °F to 158 °F)
 Humidity 100% humidity proof, fully sealed
 Shock and vibration Tested and meets the following environmental
 standards:

- Shock MIL-STD-810-F to survive a 2 m (6.56 ft) drop onto concrete
- Vibration MIL-STD-810-F on each axis
- 4-point antenna feed for submillimeter phase center repeatability
- Integral low noise amplifier
- 50 dB antenna gain
- Trimble Stealth ground plane for reduced multipath


¹ Accuracy may be subject to conditions such as multipath, obstructions, satellite geometry, and atmospheric parameters. Always follow recommended survey practices.

² Depends on WAAS/EGNOS system performance.

³ May be affected by atmospheric conditions, signal multipath, and satellite geometry. Initialization reliability is continuously monitored to ensure highest quality.

⁴ Receiver operates normally to –40 °C (–40 °F) but some office-based functions such as USB download or internal battery charging are not recommended at temperatures below freezing.

Specifications subject to change without notice.

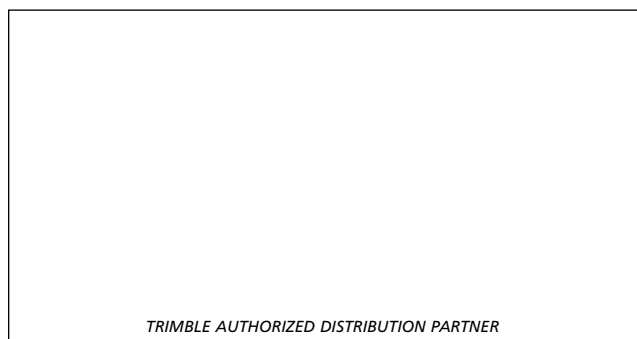

NORTH AMERICA

Trimble Engineering
 & Construction Group
 5475 Kellenburger Road
 Dayton, Ohio 45424-1099 • USA
 800-538-7800 (Toll Free)
 +1-937-245-5154 Phone
 +1-937-233-9441 Fax

EUROPE

Trimble GmbH
 Am Prime Parc 11
 65479 Raunheim • GERMANY
 +49-6142-2100-0 Phone
 +49-6142-2100-550 Fax

ASIA-PACIFIC

Trimble Navigation
 Singapore Pty Limited
 80 Marine Parade Road
 #22-06, Parkway Parade
 Singapore 449269 • SINGAPORE
 +65-6348-2212 Phone
 +65-6348-2232 Fax



www.trimble.com